




PURCHASED PART

Rev	ECO	Date
A		

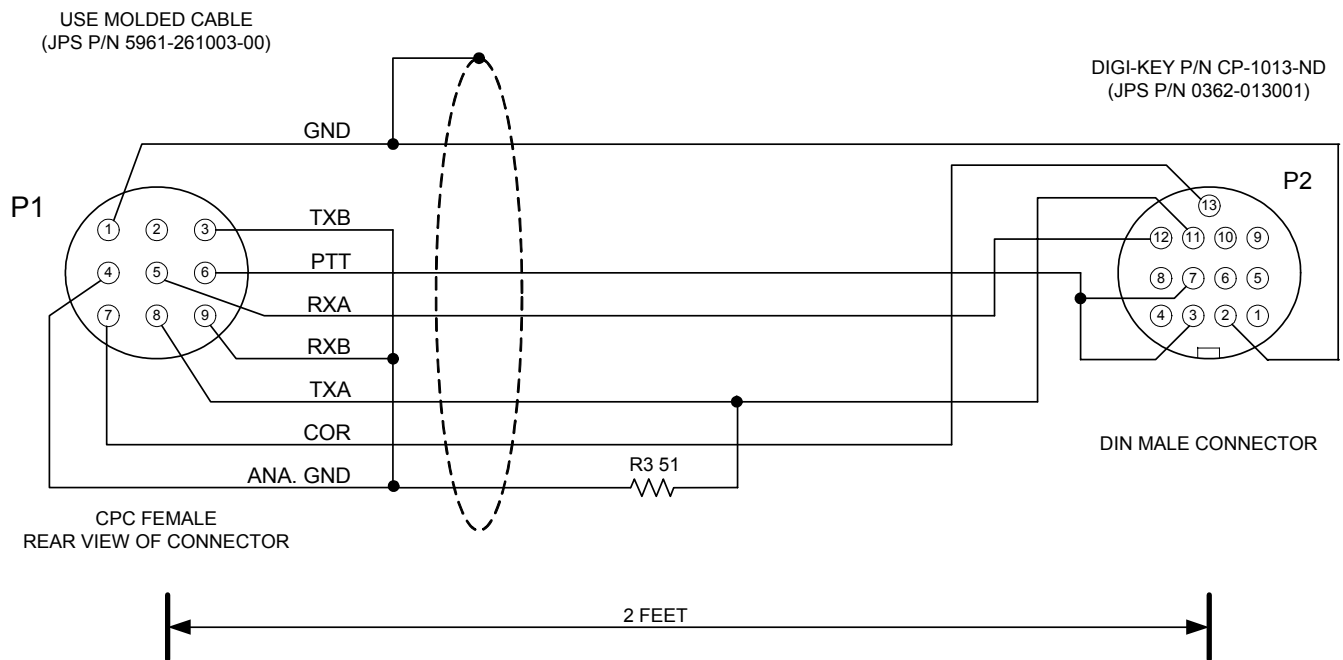

COMPONENT PCB (JPS P/N 5961-271000)	
R3	JPS P/N 1820-510000
JU1	
JU2	
JU4	
JU5	
JU6	


NOTES: SHIELD DRAIN CONNECTED TO PIN 1 OF P1 ONLY.

USED WITH:  
ICOM IC-706MKIIG MOBILE

Designed By:	CTS	<b>Raytheon JPS Communications</b> Raleigh, NC USA		
Drawn By:	EDV	Title CABLE, CPC TO ICOM IC-706MKIIG		
Checked By:	JAC	Size A	Document Number <b>5961-271154</b>	Rev A
		Issued Date	NOVEMBER 16, 2003	Sheet <u>1</u> of <u>1</u>

# PURCHASED PART

Rev	ECO	Date
A		

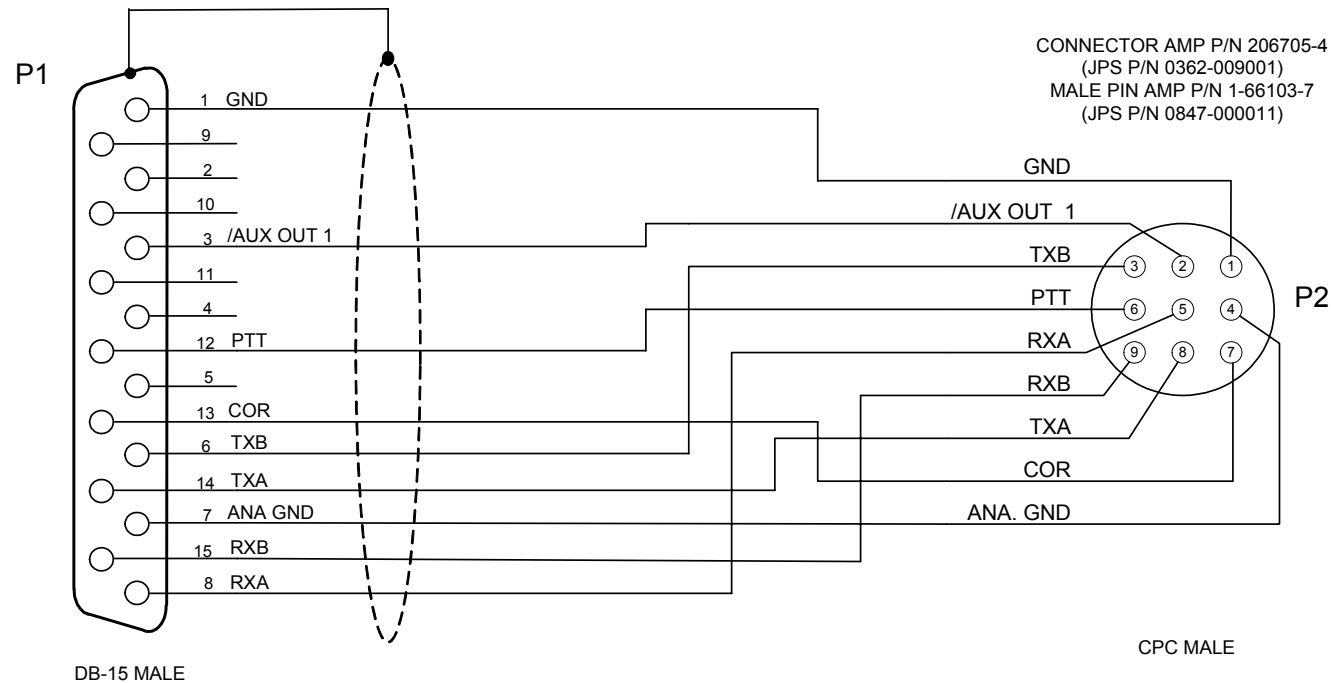

- NOTES: 1) USE BELDEN 9934 SHIELDED CABLE.  
2) CONNECT SHIELD DRAIN TO SHELL OF P1 ONLY.  
3) CONNECTORS P1 AND P2 MUST BE MOLDED TO THE CABLE.  
4) CABLE MUST BE LABELED WITH THE RAYTHEON/JPS P/N AND REV, VENDOR CODE AND DATE (MM/YY).


Designed By: JAC	<b>Raytheon JPS Communications</b>		
Drawn By: JAC	Title CABLE, ACU-1000 RADIO EXTENSION - 13 FT		
Checked By: RBP	Size A	Document Number <b>5961-261002-00</b>	Rev A
Issued Date JANUARY 5, 2004		Sheet <u>1</u> of <u>1</u>	

Rev	ECO	Date
A		

## PURCHASED PART

CONNECTOR AMP P/N 206708-1  
(JPS P/N 0362-005003)  
FEMALE PIN AMP P/N 1-66105-8  
(JPS P/N 0362-005002)

CONNECTOR AMP P/N 206705-4  
(JPS P/N 0362-009001)  
MALE PIN AMP P/N 1-66103-7  
(JPS P/N 0847-000011)

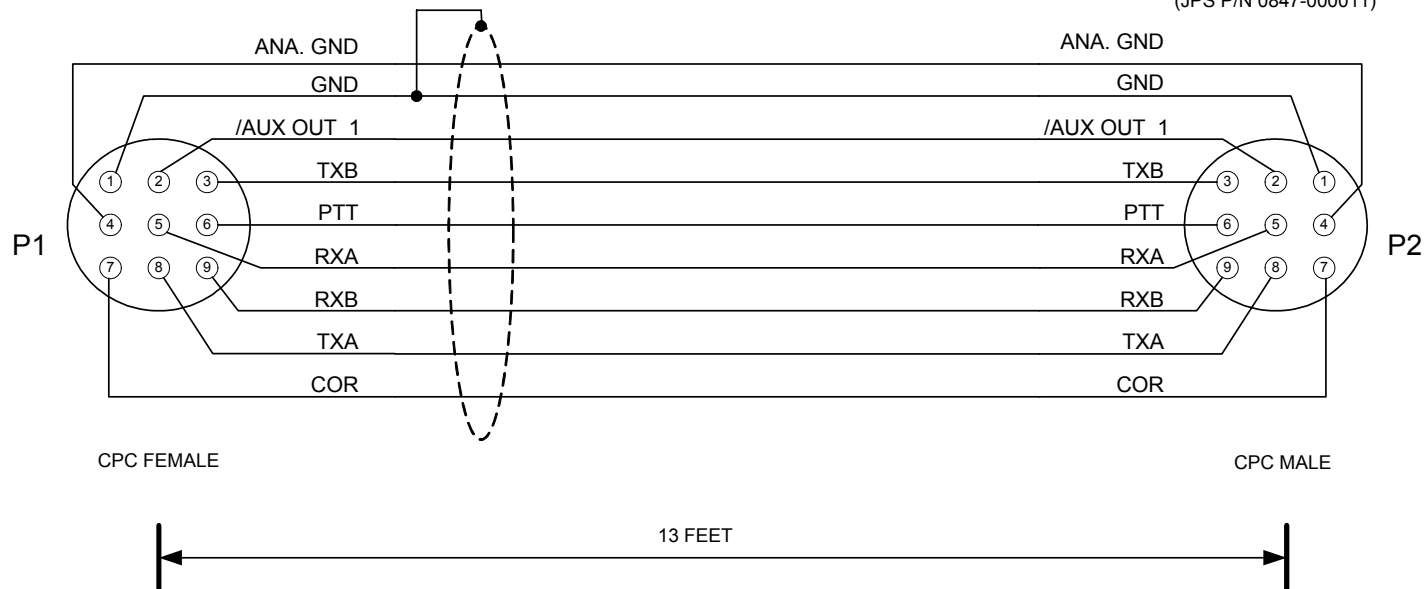

- NOTES: 1) USE BELDEN 9934 SHIELDED CABLE.  
2) CONNECT SHIELD DRAIN TO PIN 1 OF P1 ONLY.  
3) CONNECTORS P1 AND P2 MUST BE MOLDED TO THE CABLE.  
4) CABLE MUST BE LABELED WITH THE RAYTHEON/JPS P/N AND REV, VENDOR CODE AND DATE (MM/YY).

Designed By: JAC	<b>Raytheon JPS Communications</b> Raleigh, NC USA		
Drawn By: JAC	Title CABLE, ACU-T RADIO EXTENSION - 13 FT		
Checked By: RBP	Size A	Document Number <b>5961-281013-00</b>	Rev A
Issued Date JANUARY 5, 2004		Sheet <u>1</u> of <u>1</u>	